

HOW TO MAKE A LIVESTOCK GUARDIAN DOG YOKE

Bill Costanzo*



Yokes can be an important tool to correct unwanted behavior in livestock guardian dogs (LGD). A yoke is a device that goes around the dog's neck to prevent it from going under or through a fence. Yokes can be made from a variety of materials. When applied correctly, yokes can stop an LGD from wandering away from their charges by stopping them from escaping a fenced pasture. Yokes may stop your LGD from climbing over a fence, but a drag is a better option in this situation. It is important to ensure that your LGD can rest, eat, and drink with the yoke on.


Materials and supplies needed:

- ▶ 1 - 3/4-inch schedule 40 PVC pipe, 8 feet long
- ▶ Electric drill
- ▶ 3 - 1/4-inch x 2 1/2-inch bolts
- ▶ 1/4-inch drill bit
- ▶ 6 - 1/4-inch washers
- ▶ Hacksaw or PVC cutter
- ▶ 3 - 1/4-inch lock nuts
- ▶ File or reamer
- ▶ 2 - 1/2-inch x 2 1/2-inch bolts
- ▶ 2 - 1/2-inch lock nuts

* Livestock Guardian Dog Research Specialist, Texas A&M AgriLife

Directions:

1. Using a hacksaw or PVC cutter, cut one 36-inch-long piece of PVC pipe. File or ream the edges smooth.
2. Using a hacksaw or PVC cutter, cut two 30-inch-long pieces of PVC pipe. File or ream the edges smooth.
3. Make sure all holes in the next three steps are straight, or you will have difficulties in assembling the yoke.
4. On the 36-inch piece of pipe, drill three 1/4-inch holes completely through the pipe, 1 inch apart, at 13, 14, and 15 inches from each end.

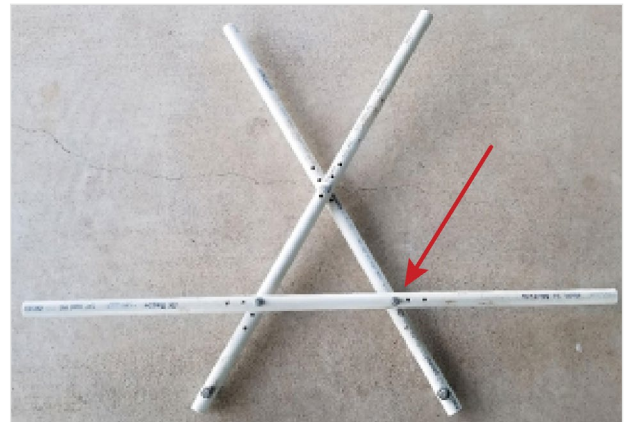

5. On one end of each 30-inch pipe, drill three 1/4-inch holes completely through the pipe, 1 inch apart, at 6, 7, and 8 inches.

